


160.2300B | Spout with Diverter



SPECIFICATIONS:

- Solid Brass construction
- Single Hole Installation
- 24 LPM Flow Rate at 3 BAR

FINISHES:

• Chrome - 160.2300B

STANDARDS:

• ASME A112.18.1 / CSA B125.1, NSF-61

LowFlow Capable




Legislation Compliance



Belgian Mirror Finish



Technical Diagram

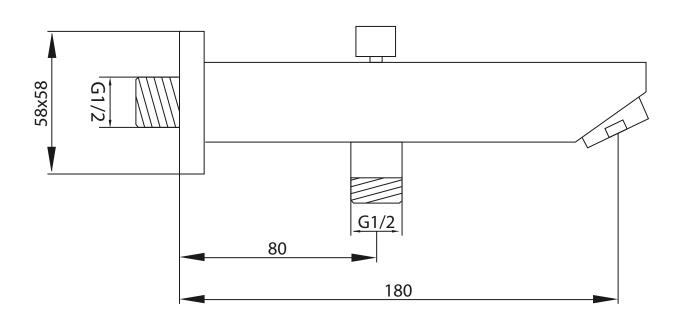

Critical Dimensions in mm www.isenberg.in