


## 160.4600 | Concealed 4-Way Thermostatic Diverter

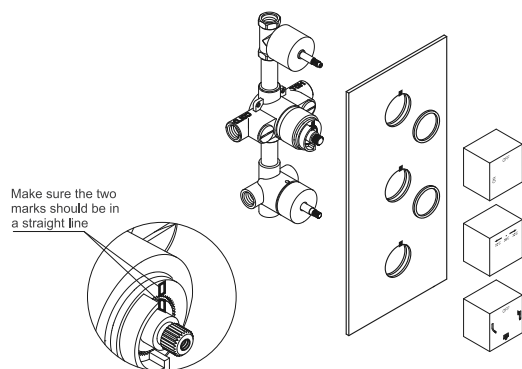

### SPECIFICATIONS:

- Solid Brass construction - includes valve
- 49 LPM Flow Rate at 3 BAR
- Diverter controls water flow between 4 outlets
- Ceramic disc cartridge allows both volume and temperature control

### FINISHES :

- Chrome - 160.4600

### STANDARDS:

- ASME A112.18.1 / CSA B125.1, NSF-61

*LowFlow Capable*



*Legislation Compliance*



*ZeroDrip Technology*



*Belgian Mirror Finish*



### Technical Diagram

