




# **UNIVERSAL FIXTURES**

## A1003A | Diverter Concealed Body



#### **SPECIFICATIONS:**

- Solid Brass Construction
- Diverter controls water flow between 2 outlets
- 17LPM Flow Rate at 3 BAR
- Ceramic disc cartridge allows both volume and temperature control

#### FINISHES:

· Chrome - A1003A

#### **STANDARDS:**

• ASME A112.18.1 / CSA B125.1


LowFlow Capable


**Legislation Compliance** 





### **Technical Diagram**

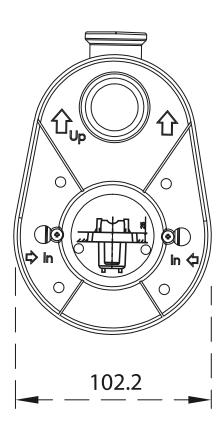

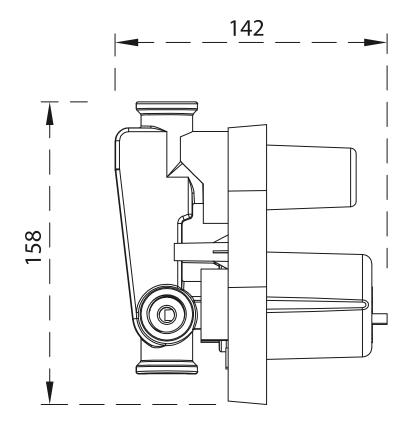

Critical Dimensions in mm www.isenberg.in